




** AVAILABLE **

0 - 10V	Bi-Level	Dimming
FULL DIMMING	100%	50%

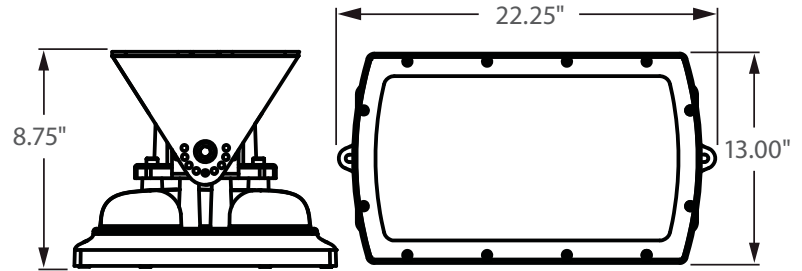

Incredible **100,000** hrs

GENERAL DESCRIPTION

Neptun's LED tunnel/viaduct fixtures feature a sleek architectural design and durability to be used in new construction or retrofit applications. The LED-27 L12 series fixture features excellent optics and its rugged design allows for use in a variety of indoor and outdoor applications. It can replace existing HID & HPS fixtures up to 400 Watts.

APPLICATION

- Tunnel Lighting
- Viaduct Lighting
- Freezer Lighting
- Storage Lighting
- Security Lighting
- Area Lighting

STRUCTURE, MATERIALS, & FEATURES

- Heavy-gauge, die-cast aluminum housing with cooling fins.
- Heat and impact resistant tempered glass lens with anti-glare diffuser.
- Corrosion resistant electrocoat grey finish.
- Continuous silicone gasket surrounds lens for weather - tight seal.
- Adjustable angle mounting brackets included.
- High Output COB LED's with borosilicate glass lens optics.
- High power factor, low THD driver with 6kV/3kA surge protection.
 - Optional 20kV/10kA surge protector available.
- Instant-On flicker-free Cold Start and Hot Re-Start.
- LED engine design with Advanced Thermal Management.
- Up to 15 year maintenance free operation.
- 10 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- **Optional:** Bi-Level Dimming, 0-10V Dimming, Remote Monitoring and ON/ OFF Control

ORDERING INFORMATION

Sample Number: LED-27150-L12-UNV-0-10VDIM-850-LD-120V-DGRY
Custom options and accessories available. Please consult factory

Series	Wattage	Voltage	Options	Mounting	CCT	Accessories	Color
LED-27 = Tunnel/ Viaduct Fixture	150-L12 = 150 W 180-L12 = 180 W 200-L12 = 200 W 220-L12 = 220 W	UNV = 120-277 VAC 347V = 347 VAC * 480V = 480 VAC * * Only Available in 150W	0-10VDIM = 0-10V Dimming BL-DIM = Bi-Level Dimming * * Includes Motion Sensor ** Contact Factory for dimming options	ASM = Adjustable Surface Mount * YK = Yoke Mount SFM = Surface Mount * Standard	835 = 3500°K 841 = 4100°K 850 = 5000°K * * Standard	LD-120V = Photocell-120V LD-277V = Photocell-277V MD = Motion Sensor ON/OFF SP = 20kV/10kA surge protector	GRY = Grey



lightinnovations@work™

PRODUCT INFORMATION

Model No.	Description	Rated Watts	Input Watts	Delivered Lumens	Universal Line Voltage (VAC)	Max Line Current (Amp) @ 120 - 277	THD	Power Factor	Weight
LED-27150-L12-UNV	Tunnel/Viaduct Fixture	150	152	18,000	120-277	1.31 - 0.56	<20%	>0.90	32 lbs
LED-27180-L12-UNV	Tunnel/Viaduct Fixture	180	182	21,600	120-277	1.57 - 0.68	<20%	>0.90	32 lbs
LED-27200-L12-UNV	Tunnel/Viaduct Fixture	200	202	24,000	120-277	1.74 - 0.75	<20%	>0.90	32 lbs
LED-27220-L12-UNV	Tunnel/Viaduct Fixture	220	222	26,400	120-277	1.92 - 0.83	<20%	>0.90	32 lbs

SPECIFICATIONS

- Driver Constant Current
- Start Method InstantON
- Hot Re-start InstantON
- Power Supply 350mA
- Driver UL Rating Class 1
- Driver UL Outdoor Rated Wet Location
- Sound Rating Class A
- ANSI Surge Protection IEEE C62.41 C High
- Current Crest Factor 1.5 maximum
- Load Regulation: 5% output current variation across load range
- Line Regulation: 1% output voltage variation across voltage range
- Driver Off-State Draw 0 Watts
- Vibration Compliance 3G
- Universal Input Line Voltage 120-277 VAC
- Input Line Frequency 50/60 Hz
- Projected (L70) @ 25°C > 100,000 hrs.
- Color Temperature 5,000°K
- Color Rendering Index (CRI) > 80
- Minimum Starting Temperature -40°C
- Maximum Starting Temperature +50°C
- Lumens per Watt > 100
- Shock / Vibration Resistant Yes
- Power Factor > 0.90
- Total Harmonic Distortion < 20%
- Inrush Current Peak < 10 Amp
- FCC Compliance Part 15, Subp. C
- Housing IP Rating IP65
- Driver IP Rating IP67
- Optics IP Rating IP68
- Warranty 10 Year

MOUNTING OPTIONS

Adjustable Yoke Mount



Adjustable Surface Mount



Surface Mount



Neptun Light, Inc.
13950 Business Center Drive
Lake Forest, IL 60045
Fax: 847.735.8004

Neptun Light, Inc. reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.
©2002-2016 Neptun Light, Inc. All rights reserved.

Spec. Rev. 7-2016